

**LARGE SIZE BCD METER**

MODEL  
MR-W200-BCD




MR-W200-BCD Digital Indicator는 BCD Signal을 입력으로 하며, 고휘도의 2.3" 대형 FND를 사용하여 먼거리에서도 식별이 용이 하도록 설계되었습니다.

■ 사양

- Input type : Dry-contact, Open-collector, TTL, 24V level
- Display : 4 digit (red) / 2.3inch (font)
- Display range : -999 ~ 9999
- Isolation : Input / Power
- Installation : Panel mount (bracket)
- Housing material : Aluminum (black)
- Ambient temp' / Humidity : 0~50°C / 10~99%RH
- Power consumption : Max 6VA
- Wiring connection : 25pin D-sub connector
- Dimension : 210(W) X 102(H) X 110(D) mm
- Panel cutout : 204(W) X 99(H) mm
- Weight : about 800g

■ 제품외형

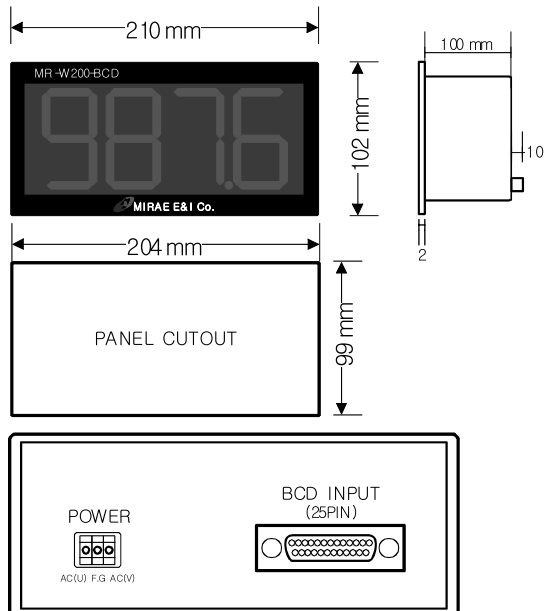

[ CONNECTION DIAGRAM ]

■ 주문코드

MR-W200-BCD-[A][B]

[A] INPUT

1. DRY CONTACT
2. OPEN COLLECTOR (PNP)
3. OPEN COLLECTOR (NPN)
4. DC24V LEVEL
5. TTL LEVEL

[B] POWER

1. AC 90~265 Volt(50Hz /60Hz)

■ BLOCK DIAGRAM

